




Frac Discharge Industrial Hose

Specification Sheet

Frac Discharge

Tube Nitrile (NBR)

Cover Corrugated Special Abrasion Resistant Cover
ARC cover provides higher abrasion resistance

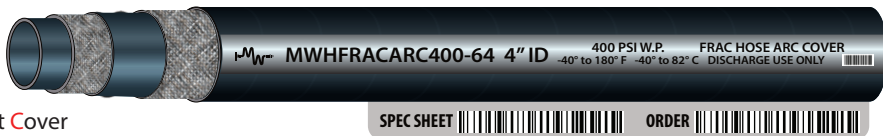

Designed for discharge use of petroleum based fluids, dilute acids, chemical and abrasive slurries used in oil and gas well stimulation and fracking.

Reinforcement Synthetic textile

Safety Factor Minimum 3 to 1
(all Frac Discharge hoses)



-40° F to 180° F



Item	ID	OD	Max WP	Bend Radius	Weight	Coil Length
	inch	inch	psi	inch	lbs/ft	feet
MWHFRACARC400-64	4	4.92	400	21.0	4.00	100

TEST DOCUMENTATION

Frac ARC 400

☐ 4"

Frac Blender 300

☐ 4"

Frac ARC/Blender 150

☐ 4"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com