




High Pressure Water Jetting

Specification Sheet

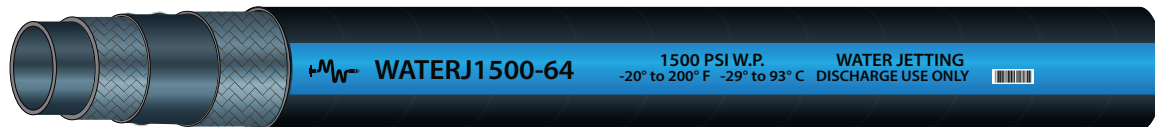

Part Number WATERJ1500-XX

High Pressure Water

Jetting

Designed to transfer water in inland water ways and offshore high pressure water jetting service. Meets all USCG requirements.

8" or assemblies more than 60 feet require special delivery

Tube Nitrile (NBR)

Cover Neoprene (CR)

Reinforcement Multiple wire braids

Safety Factor Minimum 3 to 1



A

O&G

W

ID	OD	Max WP	Bend Radius	Weight	Coil Length
inch	inch	psi	inch	lbs/ft	feet
4	5.19	1500	16	7.8	100
6	7.50		24	14.1	
8	9.75		32	22.4	

TEST DOCUMENTATION

High Pressure Water Jetting

- ☐ 4"
- ☐ 6"
- ☐ 8"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com