




# Dry Material Discharge 150 PSI

## Specification Sheet

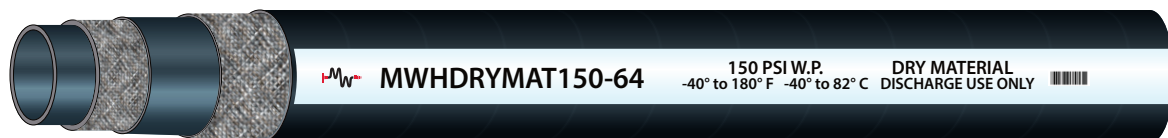

**Part Number** MWHDRYMAT150-XX

### Dry Material Discharge 150 PSI

Designed for dry bulk transfer of bulk cement, grains, animal feed, and other dry abrasive materials. High abrasion resistant tube resists cutting and gouges. Can be rolled for transport and storage.

**Tube** Natural rubber/SBR blend (static conductive/static dissipating)







**Cover** Natural rubber/SBR blend

**Reinforcement** Synthetic textile

**Safety Factor** Minimum 3 to 1



**MH**

 ID	 OD	 Max WP	 Bend Radius	 Weight	 Coil Length
inch	inch	psi	inch	lbs/ft	feet
4	5.00	150	24	4.10	200
5	6.09		30	6.01	

**TEST DOCUMENTATION** 

### Dry Material Discharge 150 PSI

☐ 4"

☐ 5"

#### APPROVAL PROCESS

JOB: \_\_\_\_\_ DATE: \_\_\_\_/\_\_\_\_/\_\_\_\_

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: \_\_\_\_\_

ENGINEER NAME: \_\_\_\_\_

ENGINEER SIGNATURE: \_\_\_\_\_



**Midwest Hose  
& Specialty, Inc.**



Find nearest location

Print setting must be on  
best quality for scanning

Corporate Headquarters  
3312 S. I-35 Service Road  
Oklahoma City, OK 73129  
405 - 670 - 6718

[www.midwesthose.com](http://www.midwesthose.com)