




Tank Truck 250 PSI Built-In Fixed x Floating Flange Specification Sheet

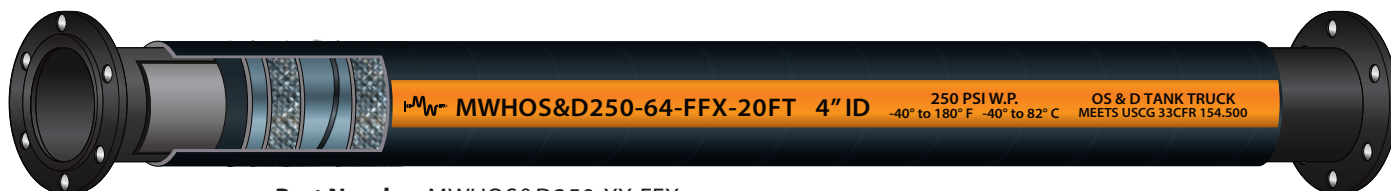

Part Number MWHOS&D250-XX-FFX

Tank Truck 250 PSI Built-In Fixed x Floating Flange

Designed to handle diesel, ethanol, gasoline, oil, and petroleum based products that has up to 50% aromatics. Used as a heavy duty suction and discharge dock hose.

Meets USCG and RMA Class II Requirements.

ANSI 150# carbon steel flanges coated in rubber for saltwater protection.

Tube Nitrile (NBR) **Cover** Neoprene (CR)

Reinforcement Multiple textile plies, heavy gauge wire helix.

Safety Factor Minimum 3 to 1



ID	OD	Max WP	Suction	Bend Radius	Weight	
inch	inch	psi	in./HG	inch	10'	20'
4	5.50	250	30 Full Vacuum	19	100	150
6	6.89			36	180	238
8	9.06			48	210	375
10	11.22			60	350	560
12	13.56			72	460	740
14	15.80			100	590	845
16	17.90			112	760	1130
18	20.11			126	925	1323



-40° F to 180° F

Tank Truck 250 PSI Built-In Fixed x Floating Flange

- ☐ 4"
- ☐ 6"
- ☐ 8"
- ☐ 10"
- ☐ 12"
- ☐ 14"
- ☐ 16"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com