




Slim Hole Rotary Hoses





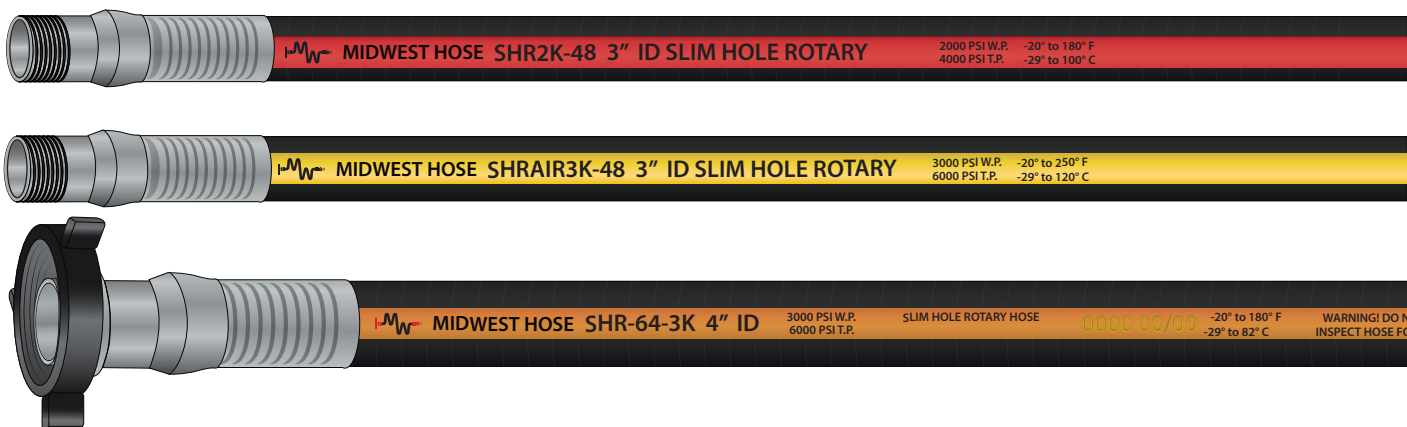





Specification Sheet



Tube Nitrile

Reinforcement high tensile wires

Cover Neoprene impregnated with PVC

Slim Hole										
		ID	OD	Max WP	Min BP	Bend Radius at WP	Bend Radius in Storage	Reinforcement	Weight	
		inch	inch	psi	psi	inch	inch		lbs./ft.	coupling
Designed to operate between 2,000 and 3,000 psi for water well, core drill, blast, or shot hole operations on portable drilling rigs, work-over rigs, slim hole and seismograph rigs.	SHR-40-2K	2-1/2	3.40	2,000	4,000	30.0	23	6 plies, braided	3.4	11.2
	SHR-48-2K	3	3.90			43.5	30		4.5	17.8
	SHRAIR-48-3K	3	3.80	3,000	6,000	43.5	30	4 plies, spiral	4.6	17.8
	SHR-64-3K	4	5.65			48.0	38		14.9	50
Max Length 150 feet Inspected Proof tested to 1.5 x WP						-20° F to 180° F				
						TEST DOCUMENTATION 				

Slim Hole

- ☐ 2-1/2"
- ☐ 3"
- ☐ 4"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com