








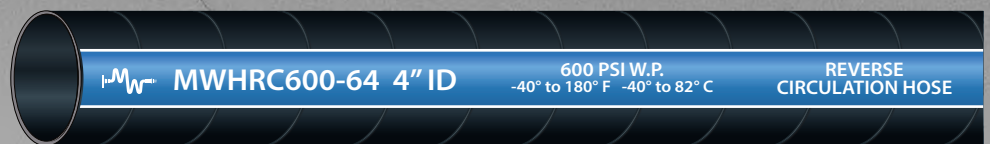

# REVERSE CIRCULATION



MWHRC600 is a premium grade, high quality reverse circulation and concrete placement hose for wet abrasive materials. The thick synthetic rubber tube provides abrasion resistance and the thick wall integrates multiple plies of reinforcement for kink resistance. The heavy duty synthetic rubber cover is resistant to abrasion, cuts, gouges, scuffs and weathering.



							
Part #	ID	OD	Max WP	Min BP	Bend Radius	Weight	Coil Length
	inch	inch	psi	psi	inch	lbs	feet
MWHRC600-32	2	3.11	600	1800	15.95	2.37	100
MWHRC600-48	3	4.17	600	1800	24.00	3.54	200
MWHRC600-64	4	5.35	600	1800	32.00	5.30	200
MWHRC600-96	6	7.91	600	1800	72.00	11.83	200
MWHRC600-128	8	9.98	600	1800	00.00	15.33	80

Vacuum: Not recommended

