


SPECIFICATIONS SHEET

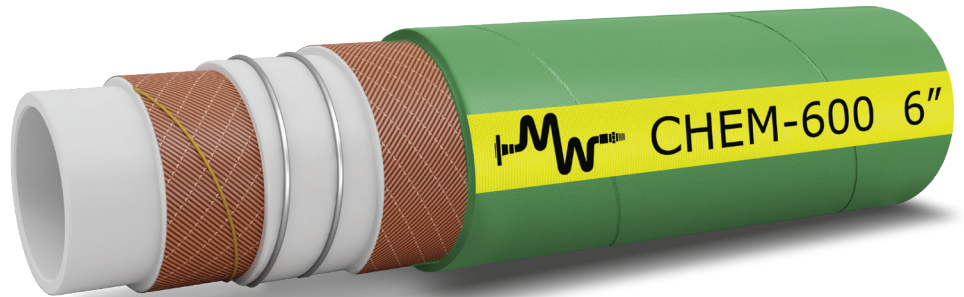

Chemical 250 PSI

Applications & Features

- Lightweight chemical transfer hose that handles 98% of every common industrial chemical used today without staining or contamination
- UHMW handles a wider variety of chemicals than XLPE at virtually the same cost

Specs

Tube Non-Chlorinated UHMW

Cover EPDM

Reinforcement Multiple textile plies with a dual helix wire

Safety Factor 3:1

Temp Range -40° F to 250° F

ID	OD	Max WP		Suction	Bend Radius	Weight	Length
inch	inch	PSI	BAR	inch/HG	inch	lbs/ft	feet
3/4	1.19	250	17	30	3.5	0.58	100
1	1.47	250	17	30	4.3	0.62	100
1-1/4	1.80	250	17	30	5.3	0.89	100
1-1/2	2.08	250	17	30	6.3	1.11	100
2	2.58	250	17	30	9.3	1.47	100
3	3.61	250	17	30	13.2	2.34	100
4	4.61	250	17	30	17.3	3.06	100
6	6.77	250	17	30	33.0	5.96	100



MIDWEST HOSE & SPECIALTY, INC