


# SPECIFICATIONS SHEET

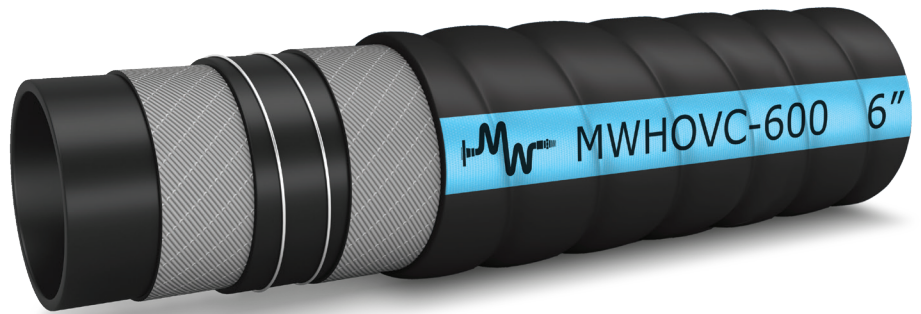

## Oilfield Vacuum Corrugated 150 PSI

### Applications & Features

- For oilfield waste pit recovery service
- Ideal for handling crude oil, salt and freshwater, tank bottoms, and drilling mud up to 35% aromatics
- Tube is designed to handle diluted solutions of hydrochloric acids and diesel fuels
- Corrugated construction easily allows flexibility

### Specs

**Tube** Nitrile RMA Type C

**Cover** EPDM

**Reinforcement** Multiple textile plies with a dual helix wire

**Safety Factor** 4:1

**Temp Range** -40° F to 180° F

ID	OD	Max WP		Suction	Bend Radius	Weight	Length
		PSI	BAR				
inch	inch			inch/HG	inch	lbs/ft	feet
1-1/2	1.89	150	10	30	5.9	0.79	100
2	2.48	150	10	30	9.1	1.30	100
3	3.46	150	10	30	13.0	1.94	100
4	4.57	150	10	30	17.1	3.04	100
6	6.73	150	10	30	25.4	5.92	100
8	8.82	150	10	30	42.1	8.77	65



**MIDWEST HOSE & SPECIALTY, INC**

800-375-2358 [www.midwesthose.com](http://www.midwesthose.com) [sales@midwesthose.com](mailto:sales@midwesthose.com) [f](#) [in](#) [v](#)