


SPECIFICATIONS SHEET

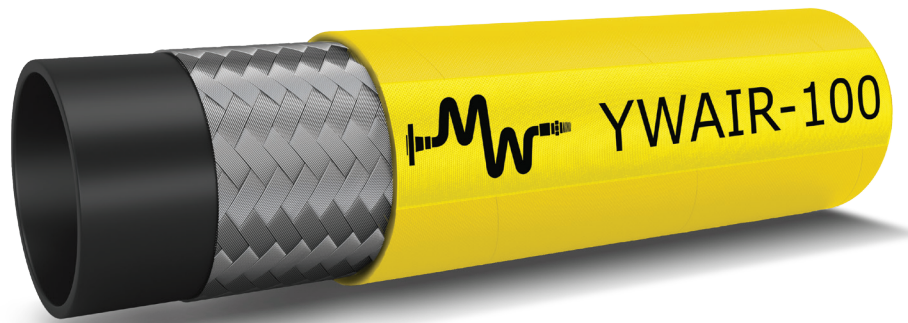

Multipurpose Suction

Applications & Features

- For air-operated construction equipment
- Can handle oil mist from compressors
- The standard for heavy duty rock drilling

Specs

Tube Nitrile/SBR blend

Cover Neoprene/SBR blend

Reinforcement High tensile steel wire braids

Safety Factor 3:1

Temp Range -40° F to +212° F

Part Number	ID	OD	Max WP		Suction	Bend Radius	Weight	Length
	inch	inch	PSI	BAR	inch/HG	inch	lbs/ft	feet
YWAIR-100	1	1.55	800	55	25	8	0.80	100
YWAIR-125	1-1/4	1.80	600	41	15	10	1.02	100
YWAIR-150	1-1/2	2.21	600	41	15	12	1.43	100
YWAIR-200	2	2.66	600	41	15	14	1.93	100
YWAIR-250	2-1/2	3.16	600	41	10	30	3.28	100
YWAIR-300	3	3.72	600	41	10	36	4.10	100
YWAIR-400	4	5.00	500	34	10	48	5.32	100



MIDWEST HOSE & SPECIALTY, INC

800-375-2358 www.midwesthose.com sales@midwesthose.com [f](#) [in](#) [v](#)