


SPECIFICATIONS SHEET

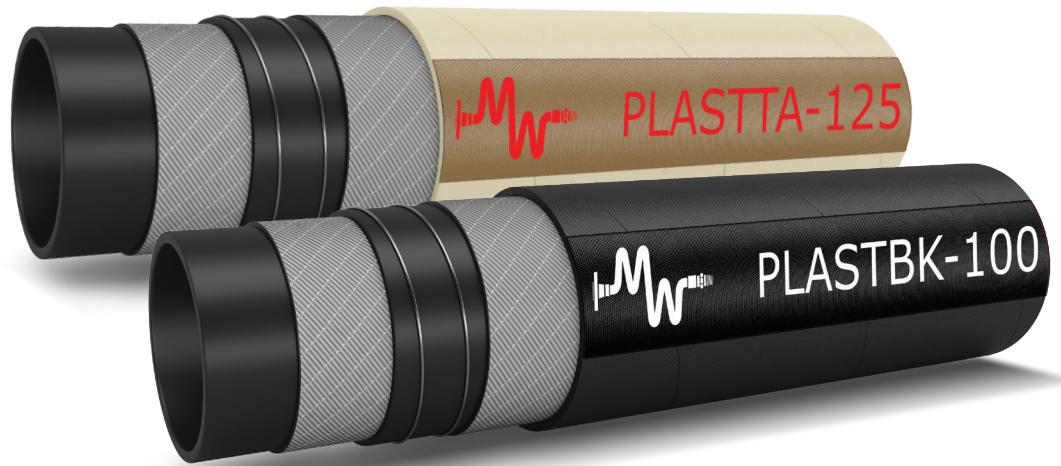

Plaster & Grout (Black & Tan)

Applications & Features

- Designed for transfer of wet concrete, cement
- Cover is weather, ozone, abrasion resistant, and aging resistant
- Tan color is non-marking

Specs

Tube NR/SBR

Cover EPDM/SBR

Reinforcement System textile or high intensity steel wire

Safety Factor 2:1

Temp Range -40° F to 180° F

Part Number	ID	OD	Max WP		Bend Radius	Weight	Length
	inch	inch	PSI	BAR	inch	lbs/ft	feet
PLASTBK-100	1	1.46	1200	82	5.82	0.490	200
PLASTBK-125	1-1/4	1.81	1200	82	7.24	0.756	200
PLASTBK-150	1-1/2	2.13	1200	82	8.26	0.978	200
PLASTBK-200	2	2.68	1200	82	11.41	1.425	200
PLASTTA-100	1	1.46	1200	82	5.82	0.490	200
PLASTTA-125	1-1/4	1.81	1200	82	7.24	0.756	200
PLASTTA-150	1-1/2	2.13	1200	82	8.26	0.978	200
PLASTTA-200	2	2.68	1200	82	11.41	1.425	200



MIDWEST HOSE & SPECIALTY, INC



800-375-2358



www.midwesthose.com



sales@midwesthose.com

