


SPECIFICATIONS SHEET

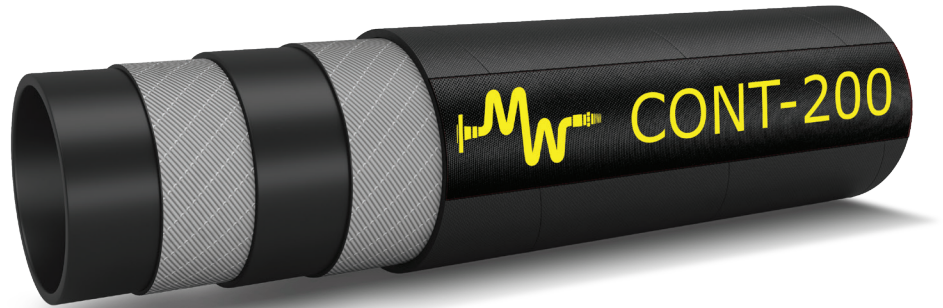

Concrete Pumping (Textile)

Applications & Features

- Handles plaster, grout, and concrete at the critical flex areas of a concrete boom truck and high pump concrete boom

Specs

Tube NR/SBR

Cover EPDM/SBR

Reinforcement Multiple layers of high tensile textile cords

Safety Factor 2:1

Temp Range -40° F to 180° F

Part Number	ID	OD	Max WP		Min BP		Weight	Length
	inch	inch	PSI	BAR	PSI	BAR		
CONT-200	2	2.83	1233	85	2466	170	1.72	100
CONT-250	2-1/2	3.40	1233	85	2466	170	2.33	100
CONT-300	3	3.92	1233	85	2466	170	2.79	100
CONT-350	3-1/2	4.69	1233	85	2466	170	3.91	100
CONT-400	4	5.02	1233	85	2466	170	4.10	100
CONT-450	4-1/2	5.67	1233	85	2466	170	5.21	100
CONT-500	5	6.24	1233	85	2466	170	5.95	100



MIDWEST HOSE & SPECIALTY, INC