


SPECIFICATIONS SHEET

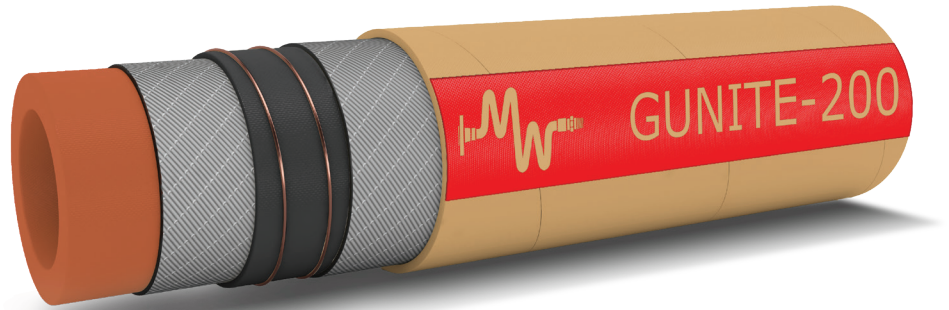

Gunite

Applications & Features

- Designed for spraying dry concrete or mortar to be mixed with water at the gun nozzle
- Non-marking cover compound to allow for work around buildings and pools
- Cover is weather, ozone and abrasion resistant

Specs

Tube 1/4" tan pure gum rubber

Cover Tan NR/SBR

Reinforcement High tensile 2 plies of synthetic textile cords, conductive copper wire

Safety Factor 3:1

Temp Range -40° F to 180° F

Part Number	ID	OD	Max WP		Bend Radius	Weight	Length
	inch	inch	PSI	BAR	inch	lbs/ft	feet
GUNITE-150	1-1/2	2.37	150	10	13	1.47	200
GUNITE-200	2	2.94	150	10	17	1.89	200



MIDWEST HOSE & SPECIALTY, INC

800-375-2358 www.midwesthose.com sales@midwesthose.com [f](#) [in](#) [v](#)