


SPECIFICATIONS SHEET

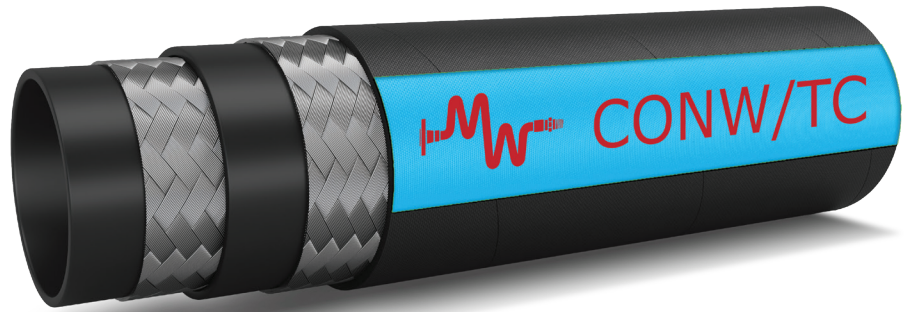

Concrete Pumping (Wire/Tough Cover)

Applications & Features

- Superior synthetic rubber cover providing multiple times the abrasion resistance of standard covers
- Perfect for high friction environments
- Handles plaster, grout, and concrete at the critical flex areas of a concrete boom truck and high pump concrete boom

Specs

Tube NR/SBR

Cover High abrasion resistant MSHA approved synthetic rubber

Reinforcement High intensity steel wire

Safety Factor 2:1

Temp Range -40° F to 180° F

Part Number	ID	OD	Max WP		Min BP		Weight	Length
	inch	inch	PSI	BAR	PSI	BAR	lbs/ft	feet
CONW/TC-400	4	5.02	1450	100	2900	199	5.7	100
CONW/TC-500	5	6.00	1450	100	2900	199	6.5	100



MIDWEST HOSE & SPECIALTY, INC

800-375-2358 www.midwesthose.com sales@midwesthose.com [f](#) [in](#) [v](#)