


SPECIFICATIONS SHEET

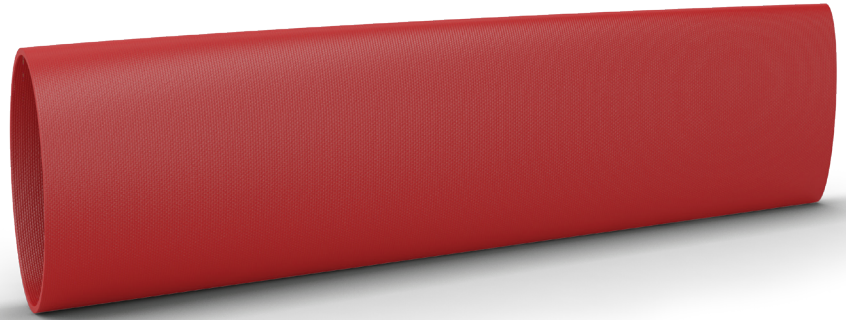

Compressed Air TPU Layflat

Applications & Features

- For compressed air for power tools and compressors
- Excellent abrasion resistance
- Flexible and lightweight to adapt to various terrain and make it possible to easily operate in difficult areas

Specs

Tube Polyurethane extruded through the weave

Cover Polyurethane extruded through the weave

Reinforcement Woven polyester

Safety Factor 3:1

Temp Range -40° F to +180° F

| Part Number | ID | Wall Thickness | Max WP | | Min BP | | Weight |
|---------------------|------|----------------|--------|-----|--------|-----|--------|
| | inch | inch | PSI | BAR | PSI | BAR | lbs/ft |
| MWHPOLYTW600-32-RED | 2 | 0.175 | 600 | 41 | 1,800 | 124 | 9.00 |



MIDWEST HOSE & SPECIALTY, INC