




Dry Material Discharge 150 PSI

Specification Sheet

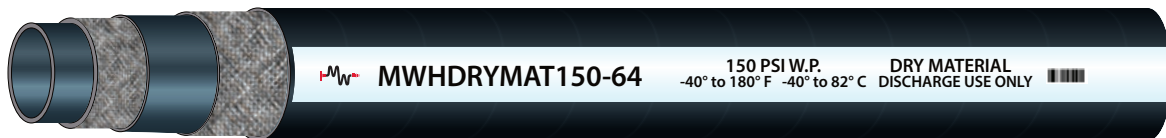

Part Number MWHDRYMAT150-XX

Dry Material Discharge 150 PSI

Designed for dry bulk transfer of bulk cement, grains, animal feed, and other dry abrasive materials. High abrasion resistant tube resists cutting and gouges. Can be rolled for transport and storage.

Tube Natural rubber/SBR blend (static conductive/static dissipating)







Cover Natural rubber/SBR blend

Reinforcement Synthetic textile

Safety Factor Minimum 3 to 1



MH

 ID	 OD	 Max WP	 Bend Radius	 Weight	 Coil Length
inch	inch	psi	inch	lbs/ft	feet
4	5.00	150	24	4.10	200
5	6.09		30	6.01	

TEST DOCUMENTATION 

Dry Material Discharge 150 PSI

☐ 4"

☐ 5"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com