




EDPM Steam 250 PSI

Specification Sheet



MWHSTEAMBK250-32 2" 250 PSI EPDM STEAM

Part Number MWHSTEAMBK250-XX



MWHSTEAMRD250-32 2" 250 PSI EPDM STEAM

Part Number MWHSTEAMRD250-XX

1" and 2" only

EDPM Steam 250 PSI

Wire braid steam hose for saturated and superheated steam up to 250 PSI and 450° F. Cover is pin pricked to allow venting to eliminate blistering and cover separation.

Steel wire braids can be utilized as a static wire to make the hose assembly electrically conductive.

NOT for use with detergents.
DRAIN AFTER USE!

Tube Nitrile (NBR)

Cover Neoprene (CR)

Reinforcement Multiple wire braids

Safety Factor 10 to 1*


working pressure dependent on temperature



-40° F to 450° F
450° intermittent temp range

S

ID	OD	Max WP	Bend Radius	Weight	Coil Length
inch	inch	psi	inch	lbs./ft.	ft.
1/2	1.00	250	5.9	0.40	100
3/4	1.25		8.3	0.51	
1	1.50		11.0	0.67	
1-1/4	1.81		14.0	0.87	
1-1/2	2.13		16.5	1.11	
2	2.64		22.0	1.80	
2-1/2	3.21		25.0	2.32	
3	3.81		30.0	3.17	

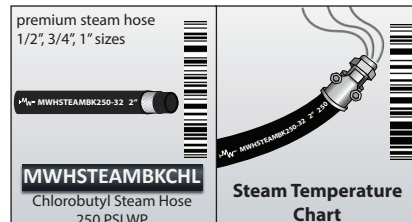

EDPM Steam 250 PSI

- ☐ 1/2"
- ☐ 3/4"
- ☐ 1"
- ☐ 1-1/4"
- ☐ 1-1/2"
- ☐ 2"
- ☐ 2-1/2"
- ☐ 3"

EDPM Steam Red 250 PSI

- ☐ 1/2"
- ☐ 3/4"
- ☐ 1"
- ☐ 1-1/4"
- ☐ 1-1/2"
- ☐ 2"
- ☐ 2-1/2"
- ☐ 3"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



Midwest Hose
& Specialty, Inc.



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com