




F2SC/ST HYDRAULIC HOSE

SPECIFICATION SHEET

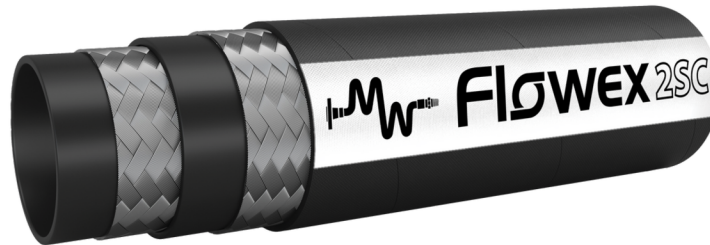

Part #	ID	OD/Tolerance	Max WP	Min BP	Bend Radius	Weight
F2SC/ST-XX	INCH	INCH	PSI	PSI	INCH	LBS
F2SC/ST-04	1/4	0.531 +/- 0.016	5800	1600	1.969	0.639
F2SC/ST-06	3/8	0.685 +/- 0.016	4790	1320	2.560	0.904
F2SC/ST-08	1/2	0.811 +/- 0.020	3990	1100	3.543	1.124
F2SC/ST-10	5/8	0.933 +/- 0.020	3630	1000	3.937	1.411
F2SC/ST-12	3/4	1.091 +/- 0.020	3120	860	4.724	1.830
F2SC/ST-16	1	1.398 +/- 0.020	2400	660	5.906	2.646

Application: Designed for delivering water and petroleum-based hydraulic fluids

Construction:

Tube: Oil resistant synthetic rubber

Cover: Abrasion, ozone, oil, and weather resistant synthetic rubber

Reinforcement: Two wire braids of high tensile steel

Temperature: -40°F to 212°F

Safety Factor: 4:1



MIDWEST HOSE & SPECIALTY

Corporate Headquarters | 3312 S. I-35 Service Road

OKC, OK 73129 | 405-670-6718 | www.midwesthose.com