




F3K/TC HYDRAULIC HOSE

SPECIFICATION SHEET

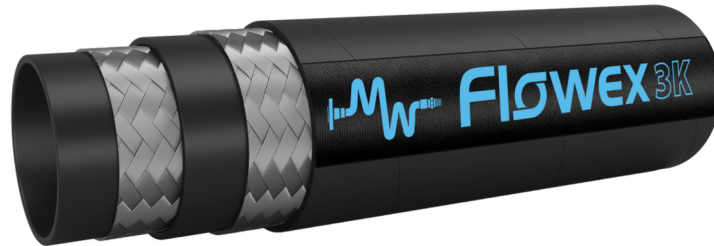

Part #	ID	OD/Tolerance	Max WP	Min BP	Bend Radius	Weight
F3K/TC-XX	INCH	INCH	PSI	PSI	INCH	LBS
F3K/TC-04	1/4	0.492 +/- 0.016	3050	840	1.969	0.419
F3K/TC-06	3/8	0.626 +/- 0.016	3050	840	2.559	0.617
F3K/TC-08	1/2	0.760 +/- 0.016	3050	840	3.543	0.794
F3K/TC-12	3/4	1.106 +/- 0.020	3050	840	4.724	1.874
F3K/TC-16	1	1.390 +/- 0.020	3050	840	5.906	2.778

Application: Designed for petroleum base hydraulic fluids and lubricating oils

Construction:

Tube: Oil resistant synthetic rubber

Cover: Abrasion, ozone, oil, and weather resistant synthetic rubber

Reinforcement: One, two, or four wire braids of high tensile steel

Temperature: -40°F to 212°F

Safety Factor: 4:1



MIDWEST HOSE & SPECIALTY

Corporate Headquarters | 3312 S. I-35 Service Road

OKC, OK 73129 | 405-670-6718 | www.midwesthose.com