




Grade D Rotary Hose





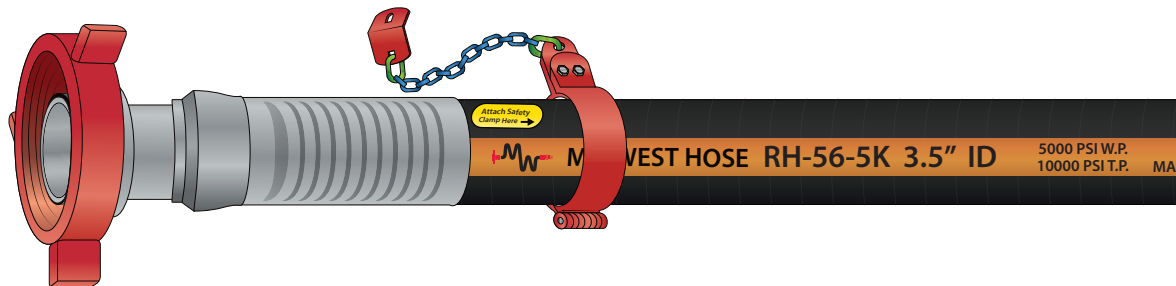


Specification Sheet



Tube Nitrile

Reinforcement 4 or 6 steel wire spiral layers

Cover Neoprene/PVC (PVC improves ozone and ageing resistance)

Grade D									
		ID	OD	Max WP	Test Pressure	Bend Radius at WP	Bend Radius in Storage	Weight	
		inch	inch	psi	psi	inch	inch	lbs./ft.	coupling
Designed for mud delivery, mud jumper, motion compensator, decoking, and water injection operations on a drilling rig. Used as a flexible connection	RH-32-5K	2	3.76	5,000	7,500	36	30	9.5	27
	RH-40-5K	2-1/2	4.36			36		11.4	40
	RH-48-5K	3	4.96			48		13.6	60
	RH-56-5K	3-1/2	5.46			54		15.5	70
	RH-64-5K	4	6.34			54		24.4	85
	RH-80-5K	Under Development							
	RH-96-5K								

Certifications API 7K-0060
Max Length 150 feet
Min Burst Requirement 12,500 psi
Inspected
Proof tested to API requirements

TEST DOCUMENTATION



Grade D Rotary Hose

- ☐ 2"
- ☐ 2-1/2"
- ☐ 3"
- ☐ 3-1/2"
- ☐ 4"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com