




HYDVAC | SPECIFICATION SHEET



APPLICATION

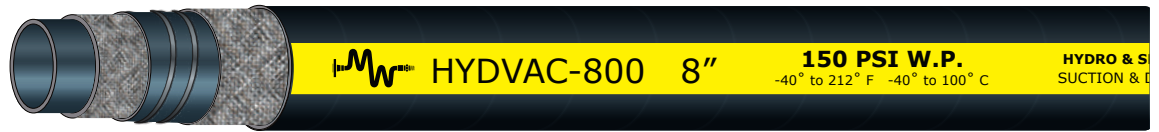








Designed for vacuum truck boom hose applications

CONSTRUCTION

- **Tube** Abrasion resistant blank natural rubber (NR).
- **Cover** Black NR/SBR cover resistant to abrasion, weather conditions, and ozone.
- **Reinforcement** High tensile synthetic textile cords, 2 steel wire helix, anti-static copper wire.

FEATURES

- Temperature -40° to 212° F
- Safety factor 2 to 1
- Abrasion and ozone resistant
- Helix wire design resists kinking and crushing
- Ideal for dry or wet abrasive materials and can be grounded.

								
Part #	ID	OD	Max WP	Min BP	Suction	Bend Radius	Weight	
HYDVAC	inch	inch	psi	psi	in/HG	inch	lbs	feet
HYDVAC-800	8	8.90	150	300	28	35	8.97	66
HYDVAC-1000	10		150	300				66



MIDWEST HOSE & SPECIALTY

Corporate Headquarters | 3312 S. I-35 Service Road
Oklahoma City, OK 73129 | 405 - 670 - 6718 | www.midwesthose.com