




MWHR14 PTFE Hose

Specification Sheet

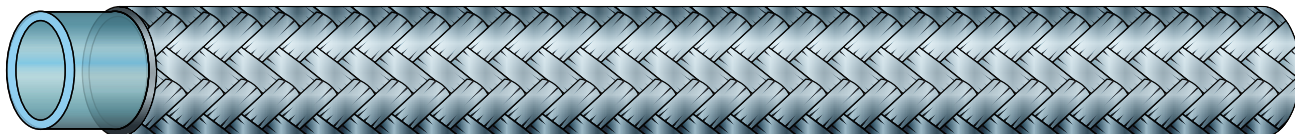

Tube Teflon/PTFE
Cover Stainless steel braid

MWHR14	 Braid ID		 Braid OD	 Max WP	 Min BP	 Bend Radius	 Weight	 Fitting Series
	inch	Tolerance (in.)	Tolerance (in.)	psi	psi	inch	lbs./100ft.	
MWHR14-03	3/16	0.187" +/- .01"	0.31" +/- .016"	3,000	12,000	2.0	6.7	R7C
MWHR14-04	1/4	0.250" +/- .014"	0.360" +/- .02"	3,000	12,000	2.0	7.4	
MWHR14-05	5/16	0.312" +/- .016"	0.42" +/- .02"	3,000	12,000	3.0	10.7	
MWHR14-06	3/8	0.375" +/- .018"	0.500" +/- .024"	2,500	10,000	4.0	13.4	
MWHR14-08	1/2	0.500" +/- .02"	0.640" +/- .028"	2,000	8,000	5.2	16.1	
MWHR14-12	3/4	0.750" +/- .024"	0.890" +/- .03"	1,200	4,800	7.7	24.8	
MWHR14-16	1	1.00" +/- .031"	1.13" +/- .047"	1,000	4,000	9.0	29.6	

TEST DOCUMENTATION



-65° F to 450° F all teflon hoses

MWHR14 PTFE Hose

- ☐ 3/16"
- ☐ 1/4"
- ☐ 5/16"
- ☐ 3/8"
- ☐ 1/2"
- ☐ 3/4"
- ☐ 1"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com