




# VACGUM | SPECIFICATION SHEET



## APPLICATION

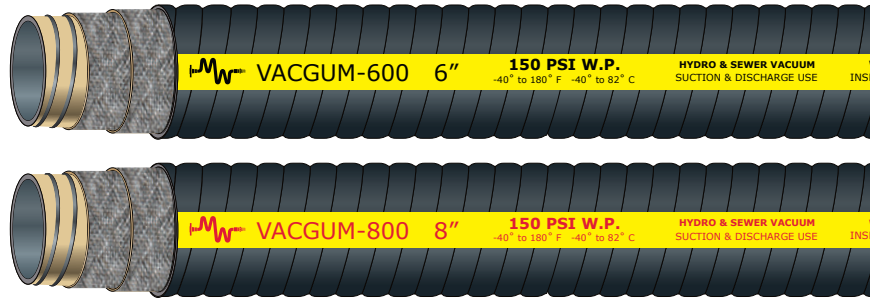








Sewer suction hose designed for cleaning trucks.

## CONSTRUCTION

- **Tube** 1/4" tan pure GUM rubber
- **Cover** Flat corrugated black NR/SBR cover resistant to abrasion, weather conditions and ozone.
- **Reinforcement** High tensile synthetic textile cords, 2 steel wire helix, anti-static copper wire.

## FEATURES

- Temperature -40° to 180° F
- Safety Factor 3 to 1
- 1/4" gum tube to offer superior abrasion resistance
- Cover is weather and abrasion resistant

								
Part #	ID	OD	Max WP	Min BP	Suction	Bend Radius	Weight	Length
	inch	inch	psi	psi	in/HG	inch	lbs	feet
VACGUM-600	6	6.89	150	300	28	27	6.15	100, 66, 32
VACGUM-800	8	8.90	150	300	28	35	8.48	100, 66, 32



**MIDWEST HOSE & SPECIALTY**

Corporate Headquarters | 3312 S. I-35 Service Road  
Oklahoma City, OK 73129 | 405 - 670 - 6718 | [www.midwesthose.com](http://www.midwesthose.com)