


SPECIFICATIONS SHEET

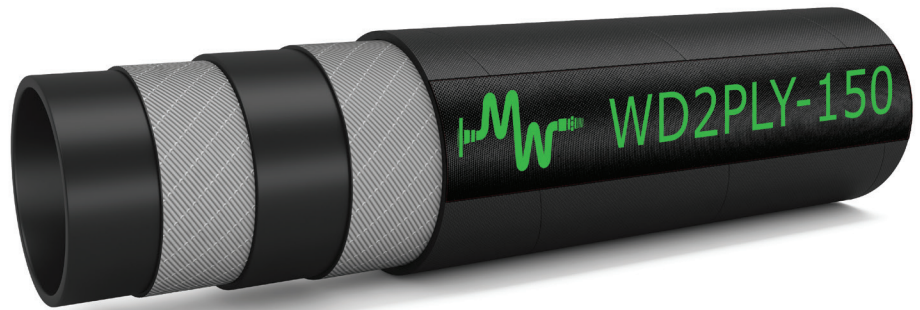

Chiller Hose - 2 Ply Water Discharge

Applications & Features

- For water discharge in construction, heavy duty equipment rental, mines and quarries
- Soft-wall hose construction provides similar performance to standard layflat hose with superior insulation and abrasion qualities

Specs

Tube SBR (synthetic rubber)

Cover SBR (synthetic rubber)

Reinforcement Synthetic textile

Safety Factor 3:1

Temp Range -40° F to 180° F

Part Number	ID	OD	Max WP		Bend Radius	Weight	Length
	inch	inch	PSI	BAR	inch	lbs/ft	feet
WD2PLY-150	1-1/2	1.78	150	10	15	0.41	100
WD2PLY-200	2	2.28	150	10	20	0.52	100
WD2PLY-250	2-1/2	2.78	150	10	25	0.65	100
WD2PLY-300	3	3.28	150	10	30	0.77	100
WD2PLY-400	4	4.31	150	10	40	1.06	100
WD2PLY-600	6	6.31	150	10	60	1.88	100
WD2PLY-800	8	8.72	100	6	80	2.61	100
WD2PLY-1000	10	10.42	80	5	100	3.47	100
WD2PLY-1200	12	12.50	80	5	120	5.40	50



MIDWEST HOSE & SPECIALTY, INC