


SPECIFICATIONS SHEET

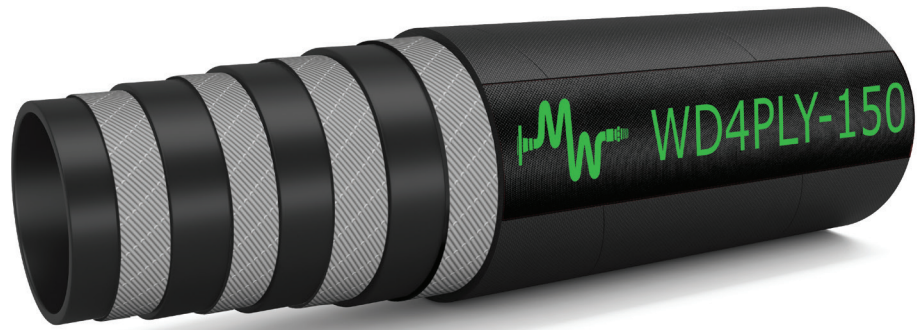

Chiller Hose - 4 Ply Water Discharge

Applications & Features

- For water discharge in construction, heavy duty equipment rental, mines and quarries
- Soft-wall hose construction provides similar performance to standard layflat hose with superior insulation and abrasion qualities
- Extra fabric layers added for durability to support higher pressures

Specs

Tube SBR (synthetic rubber)

Cover SBR (synthetic rubber)

Reinforcement Synthetic textile

Safety Factor 3:1

Temp Range -40° F to 180° F

Part Number	ID	OD	Max WP		Bend Radius	Weight	Length
	inch	inch	PSI	BAR	inch	lbs/ft	feet
WD4PLY-150	1-1/2	1.78	250	17	15	0.56	100
WD4PLY-200	2	2.28	250	17	20	0.73	100
WD4PLY-250	2-1/2	2.78	250	17	25	0.88	100
WD4PLY-300	3	3.28	250	17	30	1.04	100
WD4PLY-400	4	4.31	200	13	40	1.41	100
WD4PLY-600	6	6.31	200	13	60	2.48	100
WD4PLY-800	8	8.72	200	13	80	3.39	100
WD4PLY-1000	10	10.42	150	10	100	4.44	100
WD4PLY-1200	12	12.53	150	10	120	5.30	50



MIDWEST HOSE & SPECIALTY, INC