




Tank Truck 150 PSI

Specification Sheet

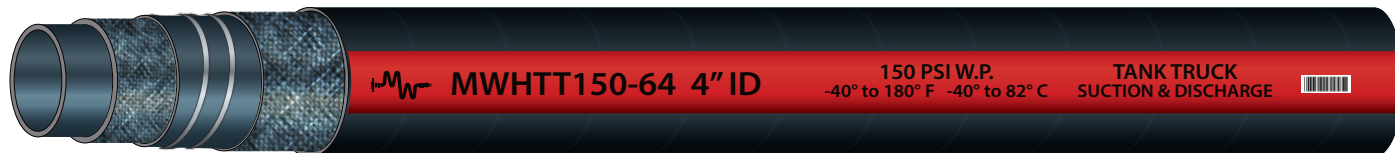

Part Number MWHTT150-XX

Tank Truck 150 PSI

Designed to handle diesel, ethanol, gasoline, oil, and petroleum based products that has up to 50% aromatics.

Tube Nitrile (NBR) **Cover** Neoprene (CR)

Reinforcement Multiple textile plies, dual helix wire

Safety Factor Minimum 3 to 1



-40° F to 180° F



ID	OD	Max WP	Suction	Bend Radius	Weight	Coil Length
inch	inch	psi	in./HG	inch	lbs/ft	feet
1-1/4	1.69	150	30 Full Vacuum	6.0	0.70	100
1-1/2	1.93			6.7	0.78	100
2	2.48			9.8	1.10	100/200
2-1/2	2.99			12.2	1.46	100
3	3.50			15.0	1.86	100/200
4	4.56			20.1	2.71	100/200
6	6.68			28.0	3.94	100
8	9.00			40.0	8.68	100

Tank Truck 150 PSI

- ☐ 1-1/4"
- ☐ 1-1/2"
- ☐ 2"
- ☐ 2-1/2"
- ☐ 3"
- ☐ 4"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com