




Rubber Water Suction Specification Sheet

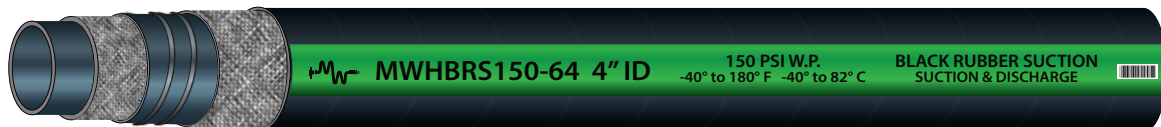

Part Number MWHBRS150-XX, MWHBRS100-XX

Rubber Water Suction

Designed for water, salt water, and mild acids such as water based agricultural fertilizers.

Tube EPDM **Cover** EPDM

Reinforcement Multiple textile plies, dual helix wire

Safety Factor Minimum 3 to 1



NOTE 10" size is corrugated for greater flexibility

ID	OD	Max WP	Suction	Bend Radius	Weight	Coil Length
inch	inch	psi	in./HG	inch	lbs/ft	feet
1-1/2	1.86	150	30 Full Vacuum	6.0	0.60	100
2	2.36			8.0	0.76	
3	3.54			14.0	1.44	
4	4.54			18.0	2.25	
6	6.68			28.0	3.94	
8	9.00			40.0	8.68	65
10	11.27	100		50.0	15.80	40
12	13.27			60.0	18.63	20

TEST DOCUMENTATION

Rubber Water Suction

- ☐ 1-1/2"
- ☐ 2"
- ☐ 3"
- ☐ 4"
- ☐ 6"
- ☐ 8"
- ☐ 10"
- ☐ 12"

APPROVAL PROCESS

JOB: _____ DATE: ____/____/____

MEETS DIMENSIONAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS MATERIAL SPECIFICATIONS: ☐ YES ☐ NO

MEETS PRESSURE / TEMPERATURE SPECIFICATIONS: ☐ YES ☐ NO

NOTES: _____

ENGINEER NAME: _____

ENGINEER SIGNATURE: _____



**Midwest Hose
& Specialty, Inc.**



Find nearest location

Print setting must be on
best quality for scanning

Corporate Headquarters
3312 S. I-35 Service Road
Oklahoma City, OK 73129
405 - 670 - 6718

www.midwesthose.com